



MVE offers the widest range of compact aluminum storage tanks available on the market today. Over the past 50 years, our product designs have improved through end-user input and evolved into a unique selection of units. The SC Series is designed for the user who has small capacity needs, but requires long-term storage and low liquid nitrogen consumption in a convenient lightweight package.

## Features Include:

- Designed for large capacity storage
- Low liquid nitrogen consumption
- Convenient lightweight package

## Accessories:



CryoGloves



Vapor Inserts



Liquid Level Alarm




Liquid Level Measuring Stick



Roller Base

## Tank Features

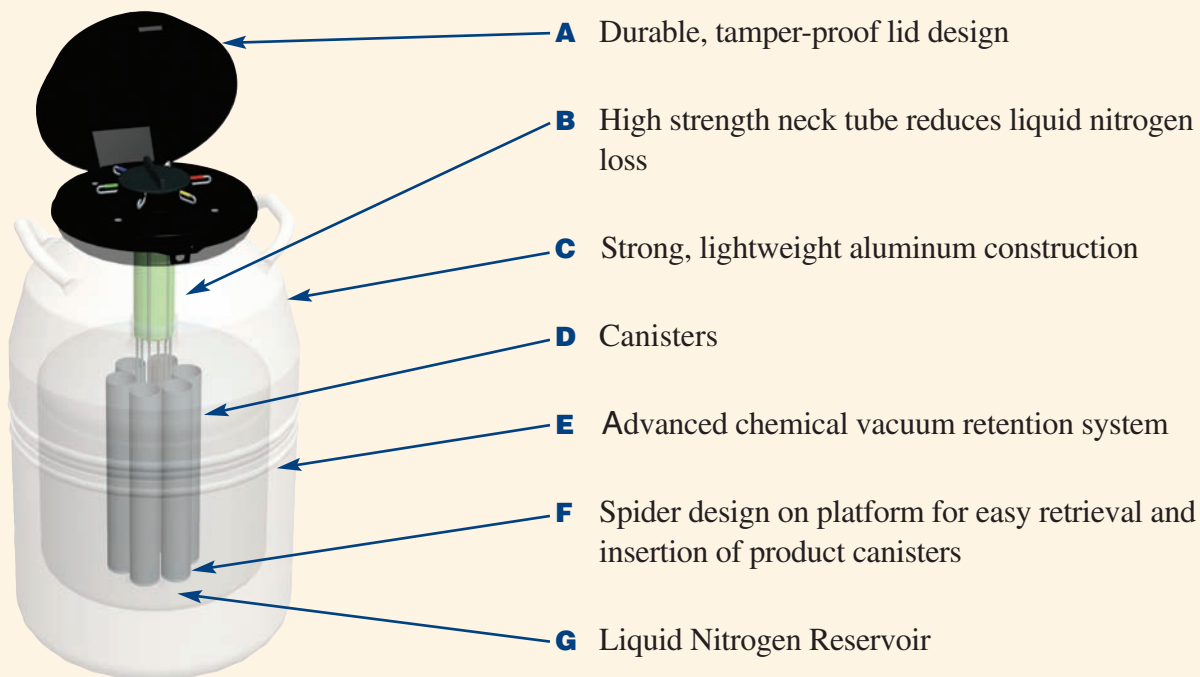

SC 3/3      SC 8/5      SC 11/7      SC 16/11      SC Millennium 20      SC 20/20      SC 33/26      SC 36/32

### Maximum Storage Capacity

	SC 3/3	SC 8/5	SC 11/7	SC 16/11	SC Millennium 20	SC 20/20	SC 33/26	SC 36/32
Number of Canisters	6	6	6	9	6	6	66	
Number of 1/2 cc Straws 10/cane	-	-	720	-	540	540	540	540
Number of 1/2 cc Straws 1 Level Bulk	1122	1122	1122	1098	780	780	780	780
Number of 1.2 & 2.0 ml Vials 5/cane	-	-	210	-	150	150	150	150

### Performance

	SC 3/3	SC 8/5	SC 11/7	SC 16/11	SC Millennium 20	SC 20/20	SC 33/26	SC 36/32
LN2 Capacity L	3.6	8.4	11.0	16.4	20.5	20.5	33.0	36.5
Static Evaporation Rate L/day	0.13	0.15	0.16	0.14	.095	0.09	0.13	0.10
Normal Working Duration, Full Days	17	35	43	74	135	142	182	224

### Unit Dimensions

	SC 3/3	SC 8/5	SC 11/7	SC 16/11	SC Millennium 20	SC 20/20	SC 33/26	SC 36/32
Neck Opening in. (mm)	2.18 (55)	2.18 (55)	2.18 (55)	2.18 (55)	2.18 (55)	2.00 (51)	2.00 (51)	2.00 (51)
Overall Height in. (mm)	16.0 (406)	18.5 (470)	21.6 (549)	17.5 (444)	25.7 (652)	25.7 (652)	25.9 (657)	27.2 (690)
Outer Diameter in. (mm)	8.7 (222)	10.2 (260)	10.2 (260)	17.2 (438)	14.5 (368)	14.5 (368)	18.2 (464)	18.2 (464)
Canister Height in. (mm)	5.0 (127)	5.0 (127)	11.0 (279)	5.0 (127)	11.0 (279)	11.0 (279)	11.0 (279)	11.0 (279)
Canister Diameter in. (mm)	1.65 (41.9)	1.65 (41.9)	1.65 (41.9)	1.50 (38)	1.50 (38)	1.50 (38)	1.50 (38)	1.50 (38)
Weight Empty lb. (kg)	8 (3.6)	12 (5.3)	17 (7.7)	14 (6.4)	23 (10.5)	26 (11.8)	34 (15.4)	34 (15.4)
Weight Full lb. (kg)	14.4 (65)	27.0 (12.1)	36.6 (16.6)	43.0 (19.6)	59.5 (27)	62.5 (28.3)	93.4 (42.4)	100.0 (44.8)

\* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

\*\* Normal Working Duration is an arbitrary reference, to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

**TWO Year Standard Warranty • FIVE Year Vacuum Warranty**  
**Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.**

For further information,  
 contact Air Products  
 T 0800 389 0202  
 E apukinfo@airproducts.com

